

Roof ventilator DHI-EC 227



ROOF VENTILATOR



ROOF GROMMET
DLV-200-1



- thermally insulated
- sound insulated

Roof ventilator system for apartments

- upblast roof ventilators
- silent operating sounds
- controlled removal of dirty air from the kitchen, bathroom, toilet and as transferred air from the other rooms
- adjustment of the demanded ventilation via the DX-Ultra PC EC, -PG EC, DS EC or DSA EC cooker hood or by 0-10v control signal
- easy to install on the soundinsulated DLV roof grommet
- mounting frame DAK-220 for flat-surface mounting
- a tiltable fan activates maintenance and cleanign of the ducts
- made of neat and weatherproof steel sheet which can be painted without primer
- service switch as an accessory

For controlling the DHI roof ventilator



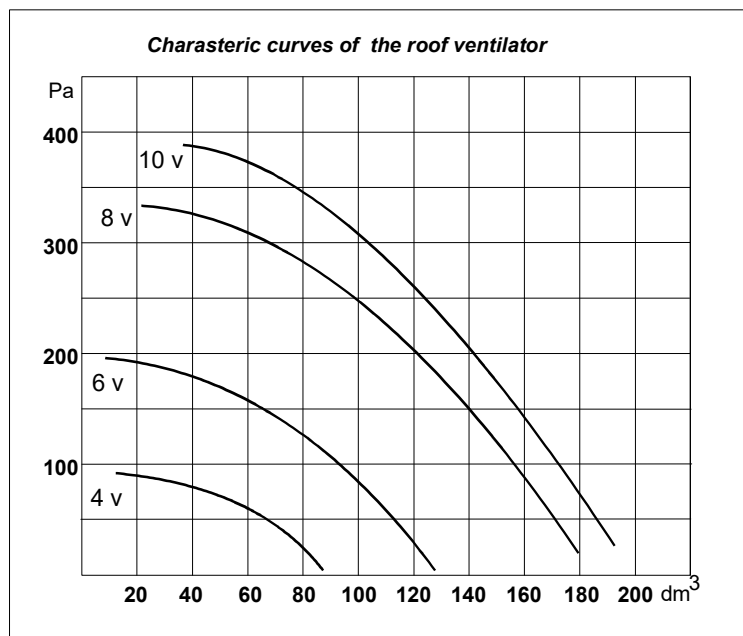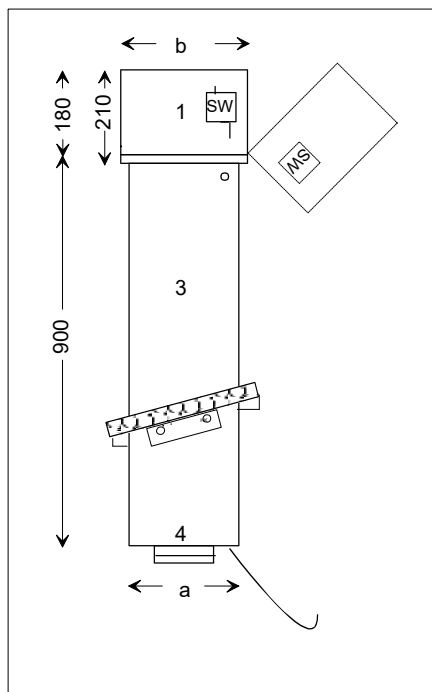

1 Roof ventilator DHI-ec227

Nominal power 85 W
Electrical connection 230V
Nominal current 0,75 A
Control signal 0-10 V


Height 180 mm
Width bxb 435 mm
Weight 5 kg

3 Roof grommet DLV-200-1
Height 900 mm
Width axa 395 mm
Weight 18 kg

4 Duct outlet Ø 200 mm

ELECTRICAL CONNECTION BETWEEN THE KITCHEN HOOD AND THE ROOF VENTILATOR

ELECTRICAL CONNECTION OF THE EC-ROOF VENTILATOR

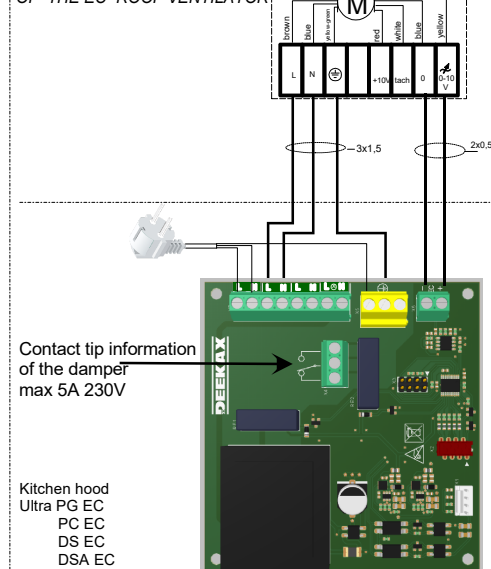

SYSTEM COMPONENTS

- 1 Roof ventilator DHI
- 3 Kitchen hood ULTRA PC EC, -PG EC, DS EC or DSA EC
- 4 Duct silencer
- 5 Extract air from rooms
- 6 Supply air (compensation air)

we are constantly developing our products and reserve the right to make changes

Deekax Air Oy
Patruunapolku 4
79100 Leppävirta
Tel. 0207 912550

www.deekaxair.fi

deekax@deekaxair.fi

