

# CONTROL DAMPER SPB 125

The control damper SPB is intended for regulating the air flow.

Control damper is equipped with 230V actuator.



Channel size 125 mm.

The adjustment damper can be used to balance the apartment-specific negative pressure of the collective exhaust system by opening the adjustment damper in the supply air duct during the cooker hood enhancement.

Compatibility:

ULTRA PC KTS and PG KTS


DS-600 KT (KTP) and DSA-900 KT (KTP)  
with status relay (option).

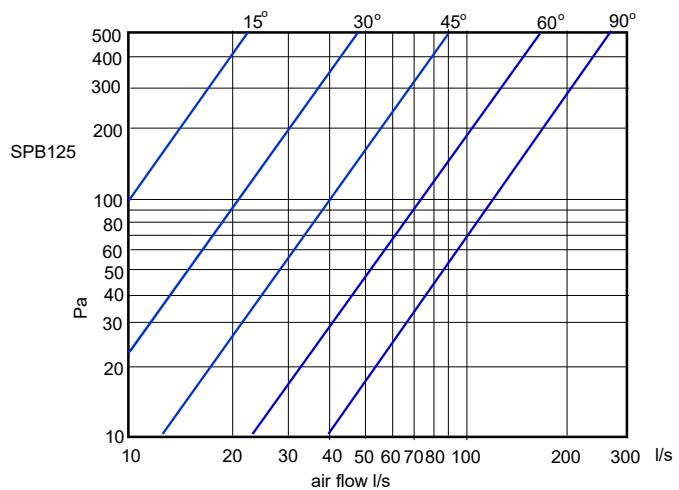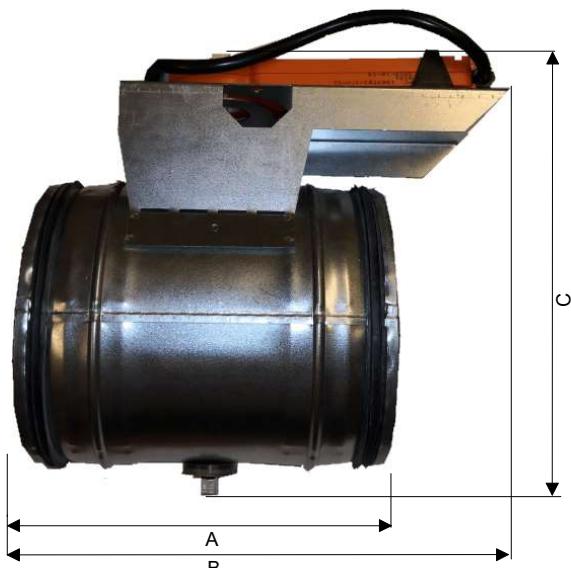

	A	B	C
SPB-125	155	205	210

## motor release with magnet

Adjustment of the open and closed position of the damper

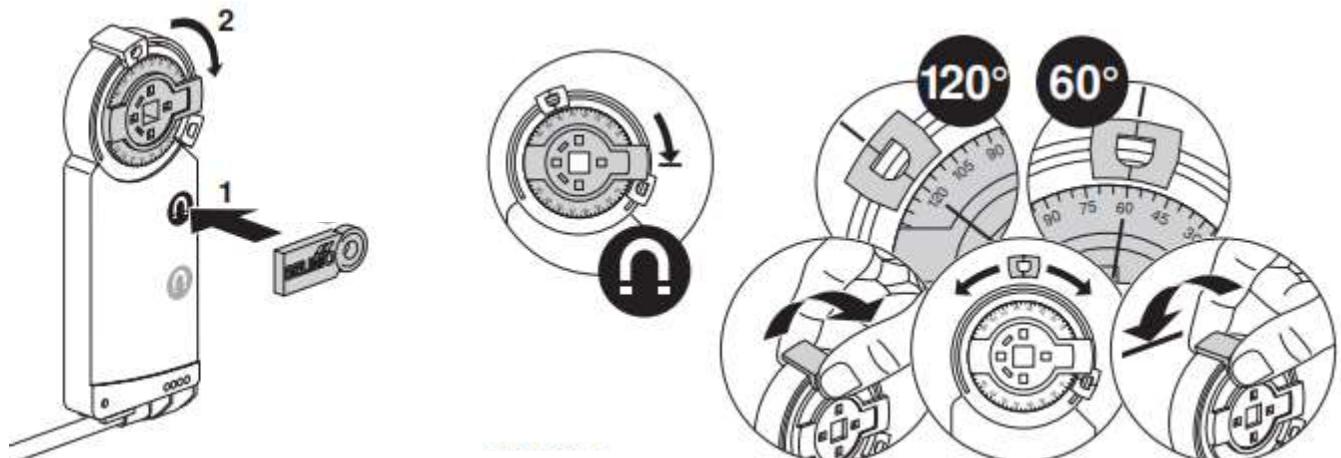

### control damper




cable length 1 m

1 blue N  
2 brown L  
3 white L

Closing damper open,  
control damper opens

### electrical connection

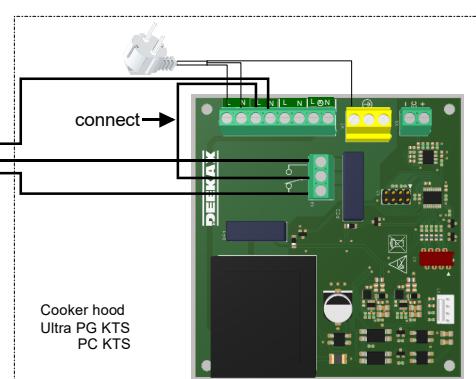

#### Note!

The control damper can be made to work  
reversely by changing the positions of wires 2 and 3

