


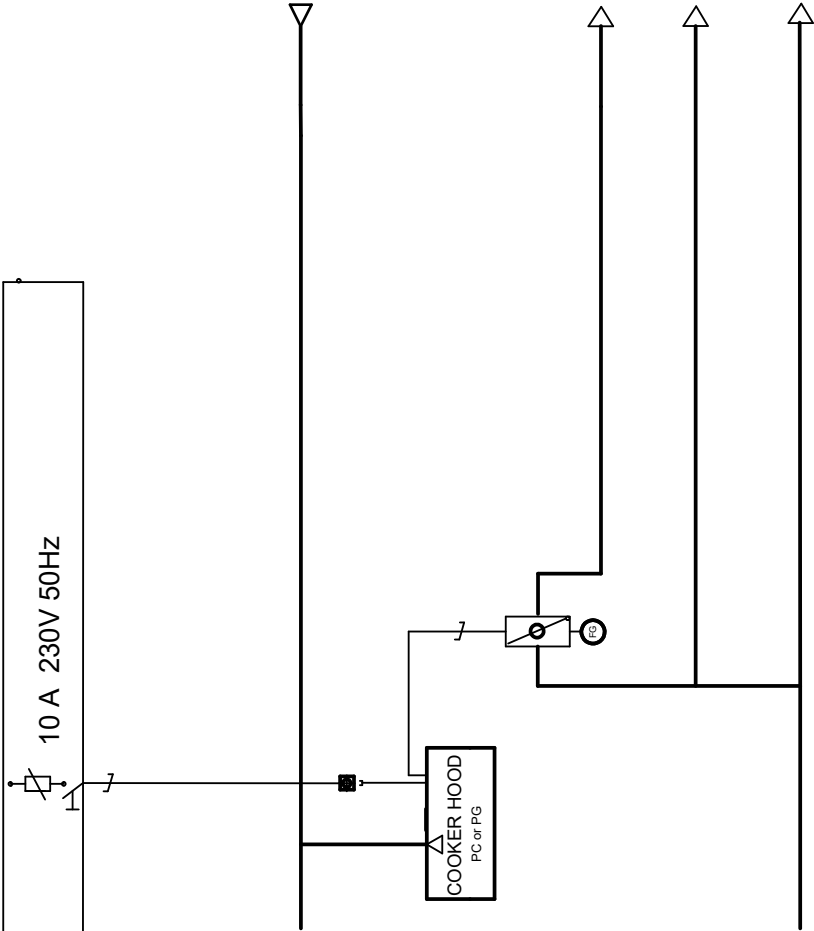

The voltage of the cooker hood boost switch 230 V
Damper and damper motor 230 V (IU)
Cabling and coupling (SU)
Switching on the cooker hood boost switch sends a message to the control damper, which opens, otherwise the damper is closed
The control damper receives power via the cooker hood
Looping of the cable to the cooker hood boost relay (SU)

DEEKAX AIR OY			CONTROL CHART Boosting of the ventilation with the cooker hood switch PC or PG cooker hood with timer + SPB damper		