

Recovering heat

VENTILATION UNIT

Deekax Talteri DIVK-C 96 CD

Deekax Talteri DIVK-C 96 CDRH

LVI 7903477 (R)


LVI 7903478 (L)

LVI 7903489 (R)

LVI 7903490 (L)



- Demand-controlled ventilation
- Heat recovery with countercurrent transfer
- Annual efficiency over 80 %
- Demand-controlled filtration and heating for supply air
- Speed adjustment by EC-cooker hood or with AHU touch control panel
- Direct current fans
- Kitchen bypass
- CDRH model with an integrated humidity transmitter
- The unit is equipped with noise insulated, white powder coated casing
- Separate connection box for external control

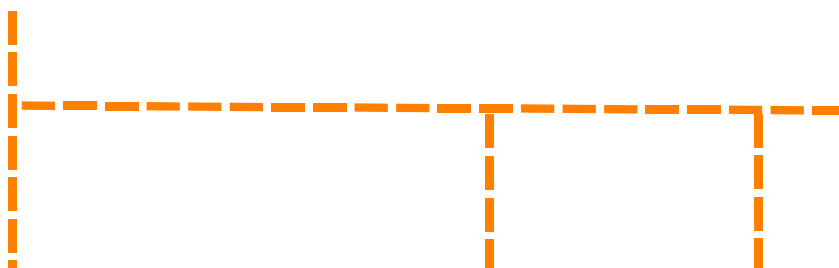


MOUNTING ACCESSORIES:


7903421 Ceiling mounting plate
7903295 Wall mounting kit
7903479 Touch screen control panel AHU for setting up

ACCESSORIES:


7903470 Touch screen control panel AHU + connection cable
8965532 Carbon dioxide transmitter

MACHINE PARTS AND TECHNICAL DATA

- Exhaust air..... ø 125 mm
- Outdoor air ø 125 mm
- Extract air..... ø 125 mm
- Supply air ø 125 mm
- Kitchen bypass..... ø 125 mm
- Maintenance switch
- Supply fan EC 166 W
- Exhaust fan EC 166 W
- Countercurrent heat exchanger
- Afterheating Electric... 500 W
- Pre-heating 1000 W
- Exhaust air filter ISO Coarse >75%
- Supply air filter ISO ePM1
- Exhaust of condensing water
- Summer bypass, automatic
- CDRH model with an integrated humidity transmitter

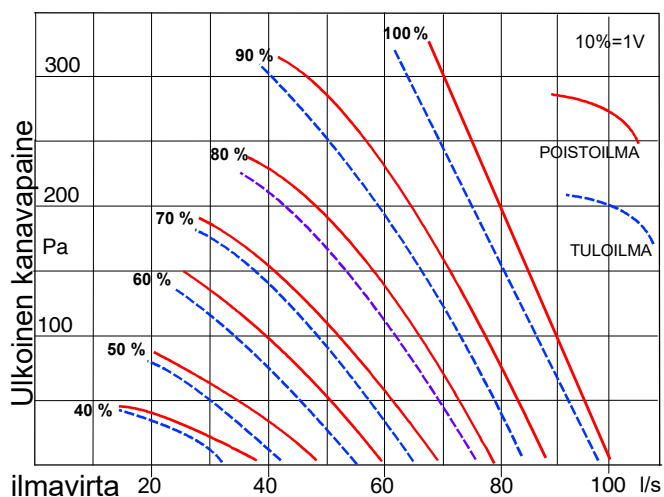

Dimensions: Height 495 mm, Width 558 mm,
Depth 520 mm, Weight 51kg

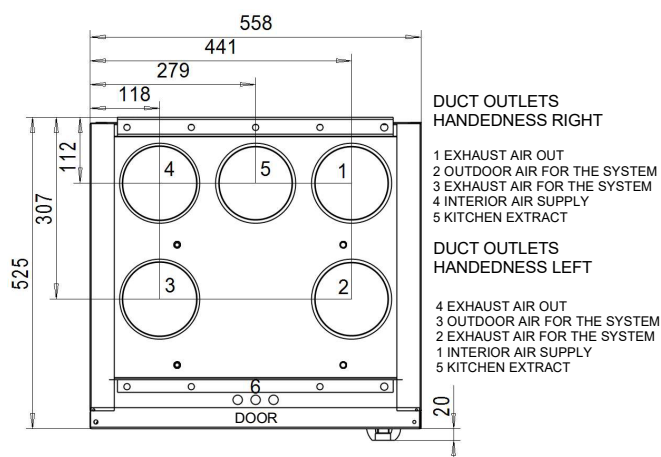

We are constantly developing our products and we reserve the right to make changes

Deekax Air Oy
Patruunapolku 4
79100 Leppävirta
Tel. +358 207 912550

www.deekaxair.fi

deekax@deekaxair.fi

