

Recovering heat

VENTILATION UNIT

Deekax Talteri DIVK-C 99 CD

LVI 7903464 (R)

LVI 7903465 (L)


Deekax Talteri DIVK-C 99 CDRH

LVI 7903491 (R)

LVI 7903492 (L)






- Channel output $\varnothing$ 125 or 160 mm
- Demand-controlled ventilation
- Heat recovery with countercurrent transfer
- Annual efficiency over 80 %
- Demand-controlled filtration and heating for supply air
- Speed adjustment by EC-cooker hood or with AHU touch control panel
- Direct current fans
- Kitchen bypass
- CDRH model with integrated humidity transmitter
- Separate junction box for external control

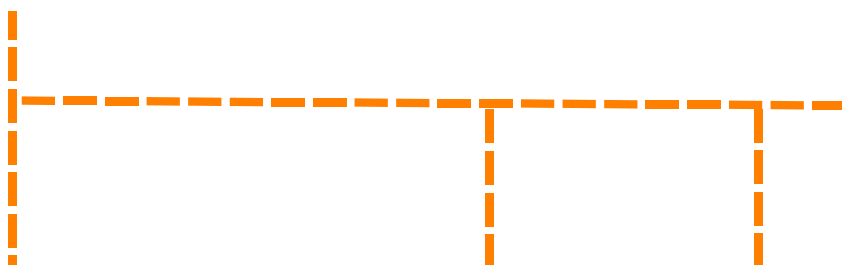



MACHINE PARTS AND TECHNICAL DATA

- Exhaust air..... ø 160 or 125 mm
- Outdoor air ø 160 or 125 mm
- Extract air..... ø 160 or 125 mm
- Supply air ø 160 or 125 mm
- Kitchen bypass..... ø 125 mm
- Maintenance switch
- Supply fan EC 166 W
- Exhaust fan EC 166 W
- Countercurrent heat exchanger
- Afterheating Electric... 500 W
- Pre-heating 1000 W
- Exhaust air filter ISO Coarse >75%
- Supply air filter ISO Coarse >75% + ISO ePM1
- Exhaust of condensing water
- Summer bypass damper with motor
- CDRH model with integrated humidity transmitter

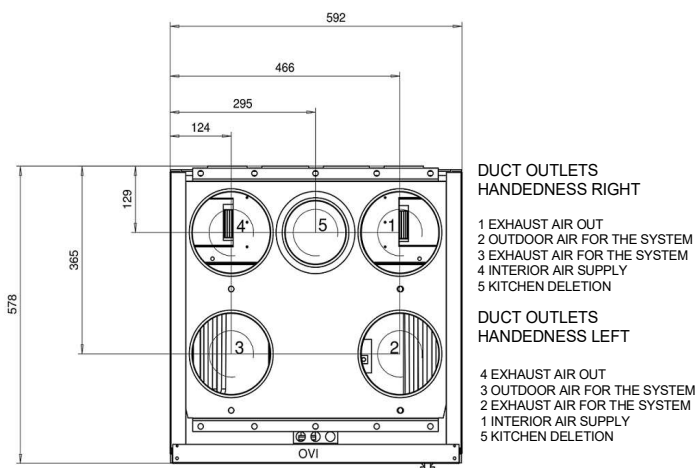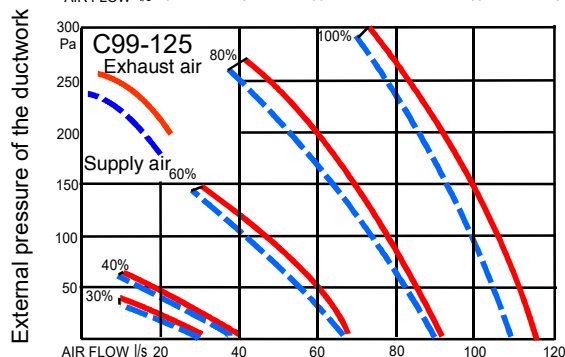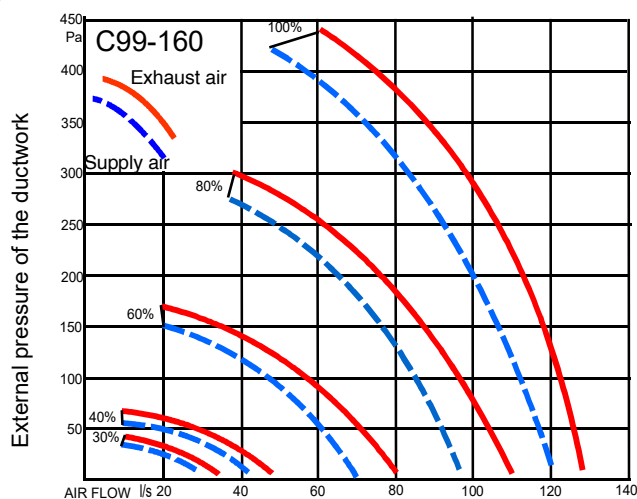


Dimensions: Height 498 mm, Width 592 mm, Depth 578 mm

MOUNTING ACCESSORIES:

7903468 Ceiling mounting plate C99-125
7903469 Ceiling mounting plate C99-160
7903466 Wall mounting kit C99-125
7903467 Wall mounting kit C99-160
7903479 Touch screen control panel AHU for setting up

ACCESSORIES:

7903470 Touch screen control panel AHU + connection cable
8965532 Carbon dioxide transmitter

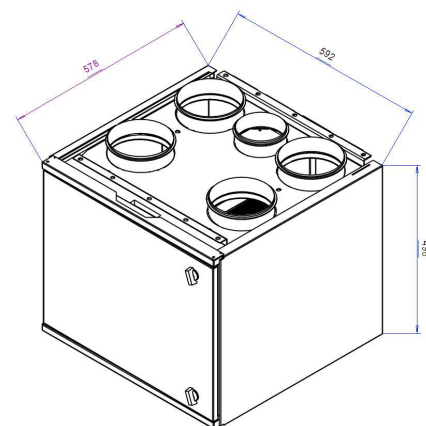

We are constantly developing our products and we reserve the right to make changes

Deekax Air Oy
Patruunapolku 4
79100 Leppävirta
Tel. +358 207 912550

www.deekaxair.fi
deekax@deekaxair.fi

