

Recovering heat

VENTILATION UNIT

Deekax Talteri DIVK-C 220 DEMA

Deekax Talteri DIVK-C 220 DEMA VKL

LVI 7903405 (R)

LVI 7903406 (L)

LVI 7903407 (R)

LVI 7903408 (L)



- Demand-controlled ventilation
- Heat recovery with countercurrent transfer
- Annual efficiency over 80 %
- Demand-controlled filtration and heating for supply air
- Separate touch screen control panel for ventilation control
- Integrated humidity transmitter
- Direct current fans




TOUCH SCREEN CONTROLLER FOR VENTILATION CONTROL


- Fan speed adjustment
- Temperatur control for supply air
- Temperature displays
- Fireplace switch
- Booster with timer
- Out of home switch
- Week clock control
- Service reminder
- Language versions: Finnish, Swedish, English and Estonian

STANDBY;

- Carbon dioxide transmitter
- Humidity transmitter
- Separate extended period or fireplace switch
- Separate boost switch
- Out of home switch
- Remote monitoring control
- Modbus

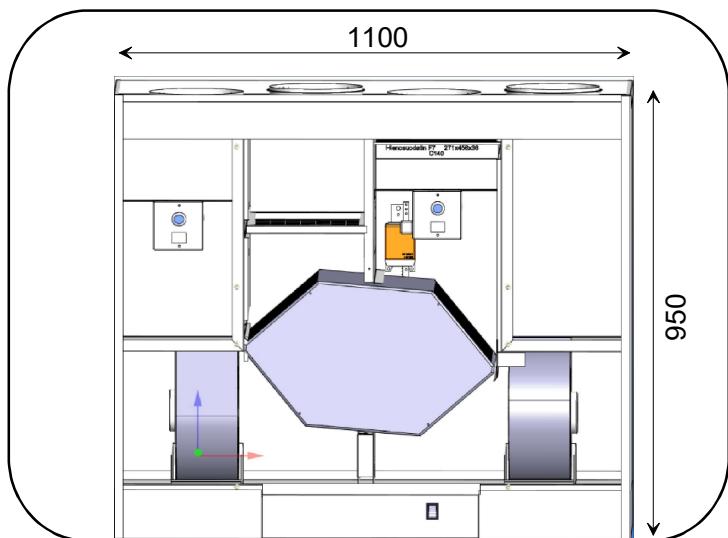

MACHINE PARTS AND TECHNICAL DATA

- Exhaust air Ø 250 mm
- Outdoor air Ø 250 mm
- Extract air Ø 250 mm
- Supply air Ø 250 mm
- Maintenance switch
- Supply fan EC 520 W
- Exhaust fan EC 520 W
- Countercurrent heat exchanger
- Afterheating Electric....1000 W or Water battery (VKL)
- Pre-heating1000 W
- Exhaust air filter ISO Coarse >75 %
- Supply air filter ISO ePM1
- Exhaust of condensing water
- Summer bypass with damper motor

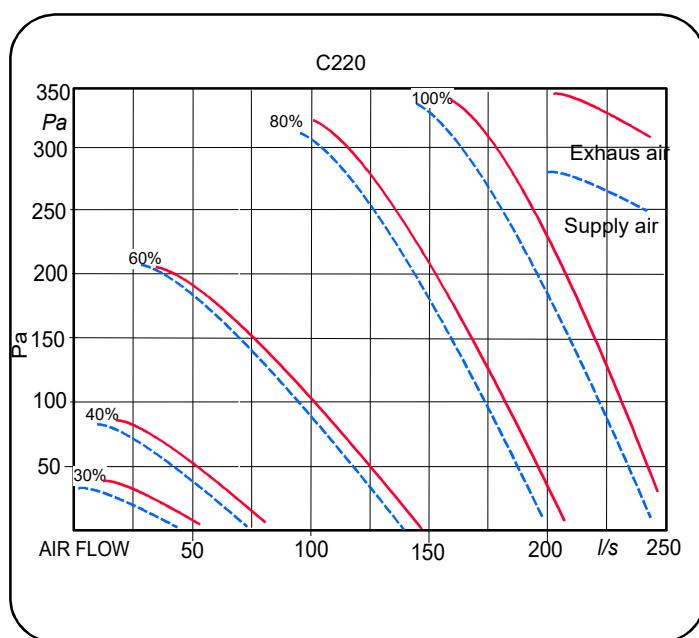


DUCT OUTLETS
HANDEDNESS RIGHT
1 EXHAUST AIR OUT
2 OUTDOOR AIR FOR THE SYSTEM
3 EXHAUST AIR FOR THE SYSTEM
4 INTERIOR AIR SUPPLY

DUCT OUTLETS
HANDEDNESS LEFT
4 EXHAUST AIR OUT
3 OUTDOOR AIR FOR THE SYSTEM
2 EXHAUST AIR FOR THE SYSTEM
1 INTERIOR AIR SUPPLY

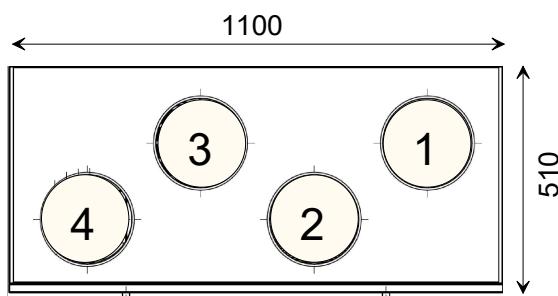

Dimensions: Height 950 mm, Width 1100 mm,
Depth 510 mm
Weight 133 kg

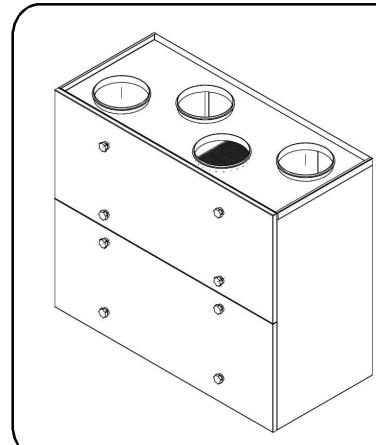

We are constantly developing our products and we reserve the right to make changes

