

Recovering heat

# VENTILATION UNIT

Deekax Talteri DIVK-C 140 DEMA

Deekax Talteri DIVK-C 140 DEMA VKL

LVI 7903396 (R)

LVI 7903397 (L)

LVI 7903398 (R)

LVI 7903399 (L)



- Demand-controlled ventilation
- Heat recovery with countercurrent transfer
- Annual efficiency over 80 %
- Demand-controlled filtration and heating for supply air
- Separate touch screen control panel for ventilation control
- Direct current fans



#### **TOUCH SCREEN CONTROLLER FOR VENTILATION CONTROL**

- Fan speed adjustment
- Temperatur control for supply air
- Temperature displays
- Fireplace switch
- Booster with timer
- Out of home switch
- Week clock control
- Service reminder
- Language versions: *Finnish, Swedish, English and Estonian*




#### **STANDBY;**

- Carbon dioxide transmitter
- Humidity transmitter
- Separate extended period or fireplace switch
- Separate boost switch
- Out of home switch
- Remote monitoring control
- Modbus




## MACHINE PARTS AND TECHNICAL DATA

- Exhaust air ..... Ø 200 mm
- Outdoor air ..... Ø 200 mm
- Extract air ..... Ø 200 mm
- Supply air ..... Ø 200 mm
- Maintenance switch
- Supply fan ..... EC 166 W
- Exhaust fan ..... EC 166 W
- Countercurrent heat exchanger
- Afterheating Electric... 1000 W or Water battery (VKL)
- Pre-heating ..... 1000 W
- Exhaust air filter ISO Coarse >75 %
- Supply air filter ISO ePM1
- Exhaust of condensing water
- Summer bypass with damper motor

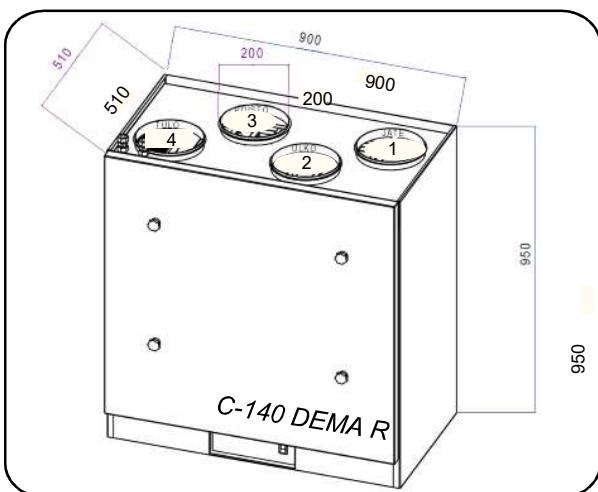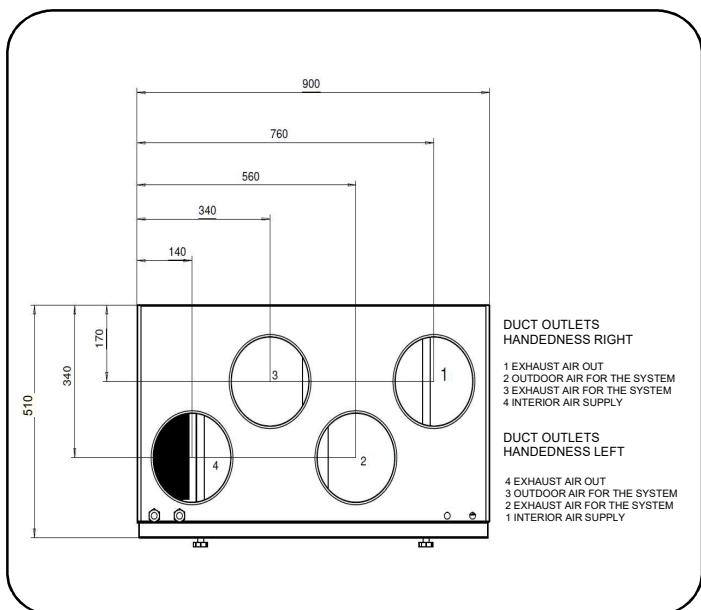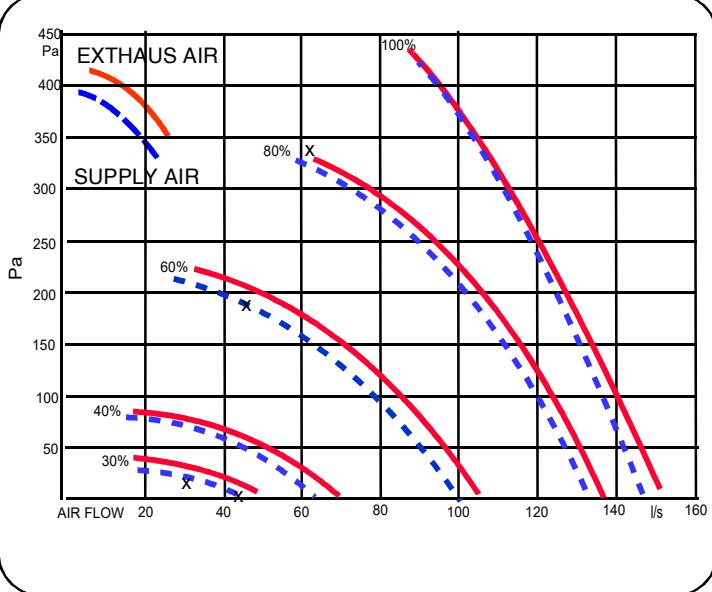

Weight 112 kg

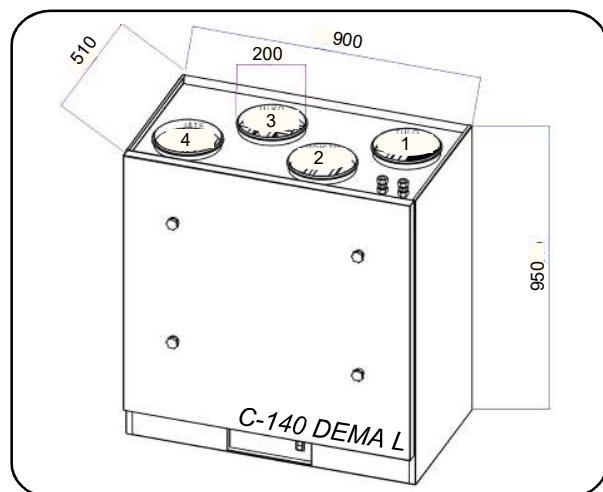

We are constantly developing our products and we reserve the right to make changes

Deekax Air Oy  
Patruunapolku 4  
79100 Leppävirta  
Puh. +358 207 912550

[www.deekaxair.fi](http://www.deekaxair.fi)  
[deekax@deekaxair.fi](mailto:deekax@deekaxair.fi)

